

## CREST SCHERMBECKER SINGLE CAMBER CLAY PLAIN TILES - 265mm x 165mm



Pre-production Brochure

The Crest Schermbecker single camber clay plain tile allows the creation of traditional and contemporary low pitch roof designs with the warmth and character of clay.

[www.crest-bst.co.uk](http://www.crest-bst.co.uk)

**crest**  
Schermbecker  
Building Products

## SINGLE CAMBER CLAY PLAIN ROOF TILE . . .

SINGLE  
CAMBER  
IN  
TOSCANA  
152



The Crest Schermbecker single camber is a non interlocking clay plain tile that is available in a range of colours.

This traditional shaped roof tile is manufactured to the highest standard using only the best raw materials available.

The most modern technologies in production facilities ensure that this profile is precise in its shape enabling the roof tilers to provide a high quality finished roof.

- > **High quality clay**
- > **Minimum roof pitch 30°**
- > **Long term durability**
- > **Eco friendly**
- > **Low maintenance**
- > **Wide range of fittings**
- > **Quick, easy & secure installation**

Whatever your needs, from traditional rustic pantiles to beautiful small and large format clay tiles, we have a wide choice of roofing materials all proven to compliment any type of project.

Throughout this brochure on the single camber plain clay roof tiles most of the details you need, however if you require more information on this or any other product including bricks please don't hesitate to call us on 01430 432 667.

SINGLE  
CAMBER  
IN  
MATT  
BLACK  
133






# A STUNNING COLLECTION OF COLOURS . . .

## TECHNICAL DATA

Size of tile	265mm x 165mm	
Minimum pitch*	30°	
Maximum pitch	90°	
Minimum headlap	65mm (roof)	35mm (vertical)
Maximum gauge	100mm (roof)	115mm (vertical)
Cover width	165mm (nominal)	
Tile thickness	11mm (nominal)	
Covering capacity (net)	60 tiles/m <sup>2</sup> at 100mm gauge (roof) 53 tiles/m <sup>2</sup> at 115mm gauge (vertical)	
Weight of tiling (approx.)	64kg/m <sup>2</sup> (0.63 kN/m <sup>2</sup> ) at 100mm gauge (roof) 56kg/m <sup>2</sup> (0.55 kN/m <sup>2</sup> ) at 115mm gauge (vertical)	
Battens required (net)	10.0 lin.m/m <sup>2</sup> at 100mm gauge (roof) 8.7 lin.m/m <sup>2</sup> at 115mm gauge (vertical)	
Batten size recommended	38 x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	38mm x 2.65mm	
Authority	BS EN 1304	

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

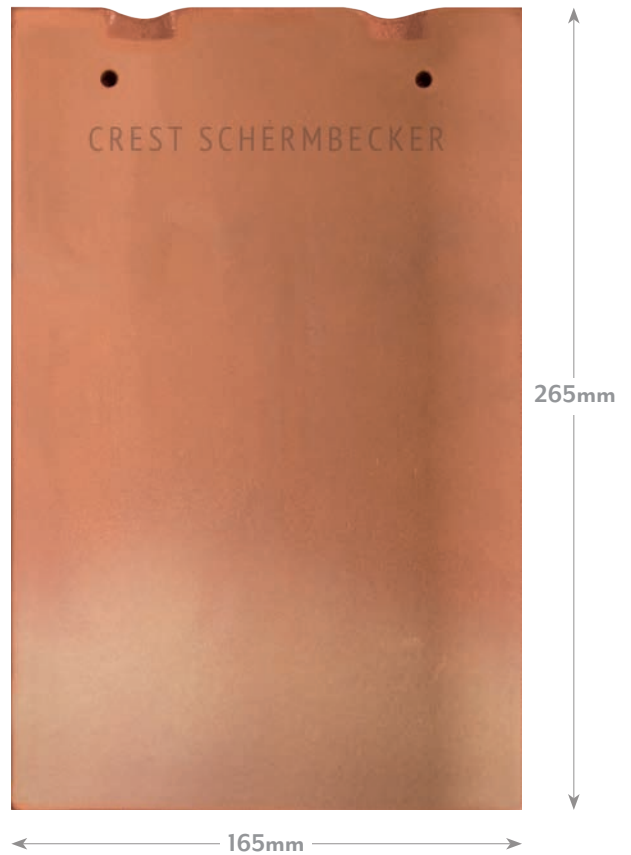

## COLOUR AVAILABILITY

Crest Schermbecker range of colours and finishes.

Please note tiles and roof tile images are for illustration purposes only.



**Natural Red - 115**



**Toscana - 152**



**Matt Black - 133**

### Colour deviations:

Our clay roofing tiles are environment-friendly building materials. When using natural raw materials you may experience colour deviations. This is often the case with naturally red tiles since the fired colour is the sole result of natural raw materials with no added metal oxides to change the colour. Deviations are also possible in the colours for reasons and limitations relating to printing methods. Clay roof tile surfaces: Minor impairments to the surface are possible due to transport or site handling. This does not effect the overall quality or performance of the tiles. (July 2023)



## Technical Support



Need help with your roof?  
Please contact our team of experienced professionals.

## Customer Service



Telephone: 01430 432 667

Opening times:  
Mon - Fri: 8.30am to 5.00pm

## Schermbecker Guarantee 30

Complete peace of mind with our 30 year guarantee  
Ask for details.

Crest are members of the Builders Merchants Federation and UFEMAT



### Head Office:

Crest Building Products  
Howdenshire Way  
Howden  
East Yorkshire  
DN14 7HZ

01430 432 667

info@crest-bst.co.uk


www.crest-bst.co.uk




## FITTINGS & ACCESSORIES CLAY PLAIN TILES

Crest Schermbecker manufacture a wide selection of clay plain roof tile fittings and accessories. Single camber clay plain roofing tile fittings and accessories are available in a selection of colours designed to match your roof. **For further details please call us on 01430 432 667.**


### PLAIN TILE FITTINGS




Tile-and-a-half



Eaves/top tile




Cloaked verge tiles




External angle tiles


### RIDGE TILES




Half round ridge




Half round ridge hip end



Half round ridge stop end




Mono ridge




Hogs back angle ridge


### HIPS AND VALLEYS




Granny hip




Semi bonnet hip




Arris hip  
Made to order



Universal Valley




Third round hip




Third round hip end


### FEATURE TILES



Club feature tile




Bullnose feature tile



Creasing tiles

### DRY FIX SYSTEM

Faster, cleaner, more effective solutions for all roofs.

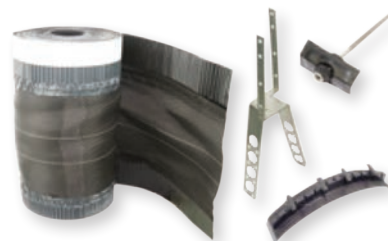

### Dry fix system for non-interlocking ridges and hips

#### Components:

- > Ventilated ridge/hip roll (6m x 300mm)
- > Universal sealing joint with clamping plates
- > Batten fixing straps
- > 100mm stainless steel screws

## Creative Roofscaping

For more information on our **roofing tiles** or to order a **FREE** tile sample contact the Crest team today.

[www.crest-bst.co.uk](http://www.crest-bst.co.uk)