

CREST NELSKAMP ROOFING TILES

H10 clay pantile



H10
in Natural Red

crest
NELSKAMP
ROOFING TILES

t: 01430 432667

www.crest-bst.co.uk

e: info@crest-bst.co.uk

Manufactured to comply with the requirements of EN1304 European Standard for Clay Roof Tiles

H10 Large Format Double Interlocking Clay Tile


▶ High quality clay tiles ▶ Minimum roof pitch 10° ▶ Economical ▶ Only 10 tiles per m²

H10 Technical details

Length	488 mm
Width	299 mm
Gauge	369-399 mm
Cov' Width (mm)	246 ± 2.0
Min' roof pitch*	10°
No. of tiles per m ²	10
Weight per tile	4.6 kg
Weight per m ² (min.)	47.3 kg
Battens per m ² (min)	2.6
Batten size (mm)	50 x 25
Fixing	Clipped

Fittings:

A wide choice of fittings are available including those below.

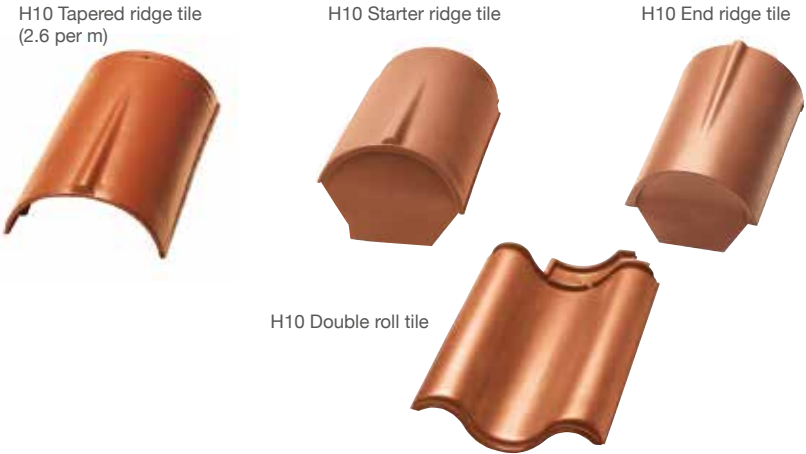

Low roof pitches 17°-10°

H10 is the perfect interlocking large clay pantile for low-pitch roofs, we recommend that these fixing practices are followed:

- Lay H10 tiles straight bond
- Headlap minimum 100mm
- Use appropriate air and vapour permeable underlay, which does not require secondary roof ventilation.
- Lay the roof underlay to the manufacturer's instructions.
- Maximum rafter length 6m
- All tiles are to be clipped with purpose-made tile clips, reference 409/009
- Roof perimeters including around roof windows must be securely fixed to BS 5534
- All areas around the roof perimeter and abutments must be properly finished as well as any areas around any 'velux type' windows (These are the areas where potential problems are likely to occur on a low roof pitch.)

The H10 range of colours:



crest
NELSKAMP
ROOFING TILES



For more information on the H10 Tile or to order a sample call us on **01430 432667**