

F10 PRO LARGE FORMAT CLAY ROOF TILE

HIGH QUALITY CLAY TILES FOR EVERY
PROJECT INCLUDING LOW PITCH



The **F10 PRO** Clay Roofing Tile is a large format **double interlocking** profile clay tile that is available in a range of colours, finishes and fittings.

F10 PRO
FINISHED
IN BLACK

www.crest-bst.co.uk

crest
NELSKAMP
ROOFING TILES

THE F10 PRO LARGE FORMAT CLAY TILE

F10 PRO
RED
BROWN



F10 PRO
ANTHRACITE
GREY

High-Quality

The F10 Pro tiles are made of 100% Westerwald clay in ceramic quality. Due to their low water absorption (<3%), they are extremely frost resistant, strong and impress over the long term with an extraordinary aesthetic rooftop pattern with significantly lower lichen growth.

Economical Coverage

The Size 10 format delivers not only faster installation times but also significant savings on the supporting substructure. With a requirement of just 9.6–10.4 tiles per m², it offers outstanding material efficiency and cost-effectiveness, making it a highly economical roofing solution. Like all Crest Nelskamp tiles the F10 PRO clay roofing tile is available with a wide range of fittings.

- > Technologically Advanced
- > Minimum roof pitch 10°
- > Long term durability
- > Eco friendly
- > Low maintenance
- > Wide range of colours & fittings
- > Aesthetic rooftop pattern
- > Quick, easy & secure installation

Whatever your needs, from traditional rustic pantiles to beautiful large format clay tiles and crafted glazed tiles, we have a wide choice of roofing materials all proven to compliment any type of project.


Throughout this brochure on the F10 Pro you should find most of the details you need, however if you require more information on this or any other product please don't hesitate to call us on 01430 432 667.



LARGE FORMAT DOUBLE INTERLOCKING . . .

TECHNICAL DATA

Length ~ 489 mm.
Width ~ 295 mm.
Gauge ~ 404 mm to 428 mm.
Covering Width ~ 242 mm ± 1.0 mm.
Minimum low roof pitch ~ 10°
Number of tiles per m ² ~ 9.6 - 10.4 pcs
Weight per tile ~ 3.75 kg.
Weight per m ² (min.) ~ 44.00 kg.
Battens required per m ² (min) ~ 2.5
Batten size (mm) ~ 50 x 25
Fixing ~ Clipped

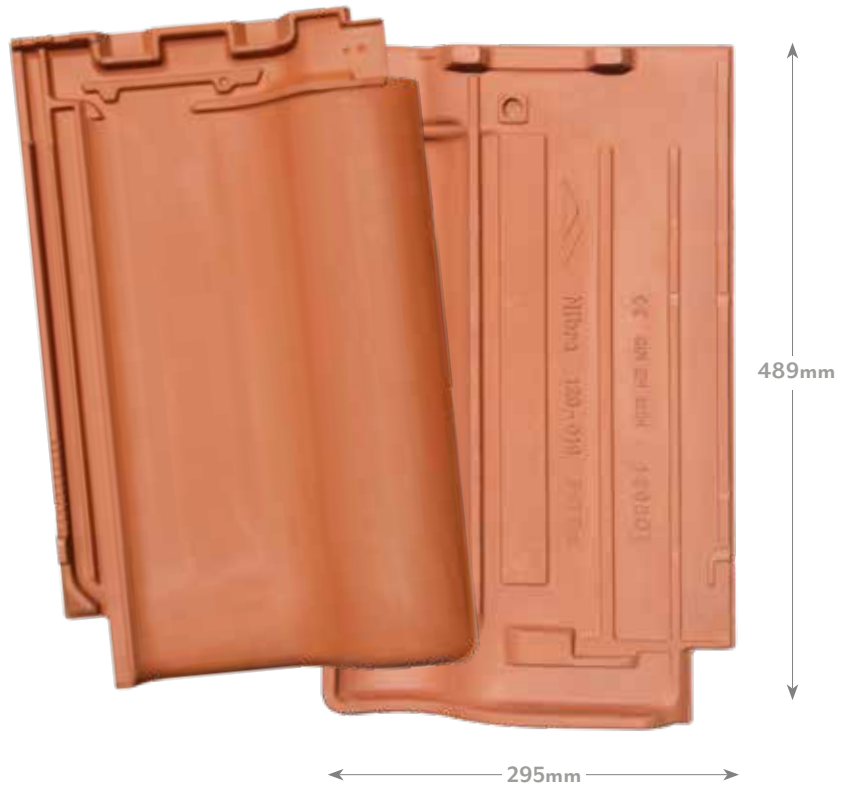

LOW PITCHES 17°-10°

- > Use appropriate air and vapour permeable underlay, which does not require secondary roof ventilation.
- > Lay the roof underlay to the manufacturer's instructions.
- > Lay F10 Pro straight bond.
- > Headlap minimum 100mm.
- > All tiles are to be clipped with purpose-made tile clips, reference 409/215
- > Left Hand Verge tiles are to be fixed with 45mm tile fixing screw with a neoprene washer, also fix verge clips if mortar bedding the verge.
- > Roof perimeters including around roof windows must be securely fixed to BS 5534.
- > Further low pitch roofing advice available on our website.

COLOUR AVAILABILITY

F10 PRO range of colours and finishes.



Colour deviations:

Our clay roofing tiles are environment-friendly building materials. When using natural raw materials you may experience colour deviations. This is often the case with naturally red tiles since the fired colour is the sole result of natural raw materials with no added metal oxides to change the colour.

Deviations are also possible in the colours for reasons and limitations relating to printing methods. Clay roof tile surfaces: Minor impairments to the surface are possible due to transport or site handling. This does not effect the overall quality or performance of the tiles. (June 2026)



Technical Support



Need help with your roof?
Please contact our team of experienced professionals.

Customer Service



Telephone: 01430 432 667
Opening times:
Mon - Fri: 8.30am to 5.00pm

Nelskamp Guarantee



Complete peace of mind with our 30 year guarantee
Ask for details.

Crest are members of the Builders Merchants Federation and UFEMAT



Head Office:
Crest Building Products
Howdenshire Way
Howden
East Yorkshire
DN14 7HZ

01430 432 667

info@crest-bst.co.uk

www.crest-bst.co.uk



F10 PRO ACCESSORIES CLAY FITTINGS, RIDGES AND SPECIAL TILES


Crest Nelskamp manufacture a wide selection of clay roof tile fittings and accessories. The F10 PRO special tiles are available in a selection of colours designed to match your roof. For further details please call us on 01430 432 667.

STANDARD TILES AND VERGE TILE FITTINGS



All sizes are approx. Tolerances according to DIN EN 1304.
Covering sizes are to be determined on site.
Subject to technical changes.

RIDGE AND HIP TILES

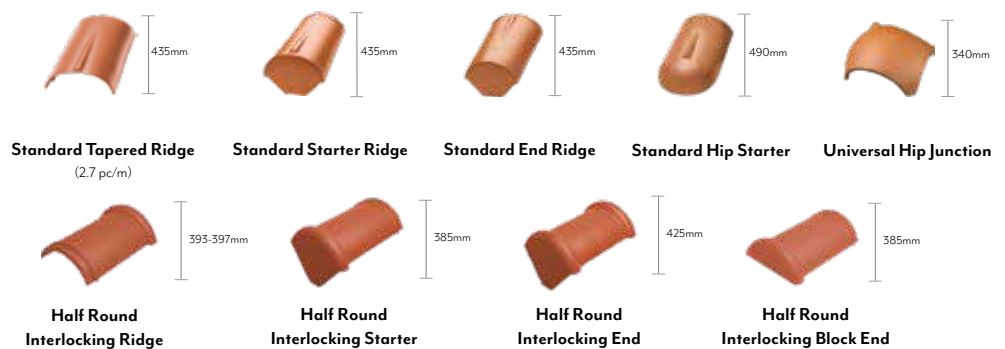

FIXINGS




DRY FIX SYSTEM



Nekoroll dry fix system for ridge and hip

Faster, cleaner, more effective solutions for all roofs.
The highest quality aluminium ridge roll using the latest micro-ventilation technology. Provides excellent protection and ridge and ridge ventilation.

TECHNICAL DATA

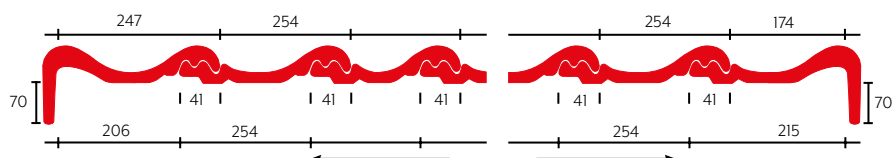

Covering width of left gable tile, approx. 247 mm
Covering width of the right gable tile, approx. 174 mm



Creative Roofscaping

For more information on our roofing tiles or to order a FREE tile sample contact the Crest team today.

www.crest-bst.co.uk